

AIR HOSES

PREMIUM REINFORCED HYBRID AIR HOSES

Advanced Hybrid Hose features the Strength of reinforced PVC with the superior flexibility of rubber!




BRASS MALE FITTINGS AND HOSE GUARDS ON BOTH ENDS.

**STAYS FLEXIBLE IN THE COLD,
DOESN'T KINK IN THE HEAT**



Item Number	Length	Male Fittings	Max Pressure	Inside Diameter
A 26032	32 ft. (10m)	1/4" Brass	300 psi	3/8" (9.2mm)
B 26065	65 ft. (20m)	1/4" Brass	300 psi	3/8" (9.2mm)
C 26100	100 ft. (30m)	1/4" Brass	300 psi	3/8" (9.2mm)

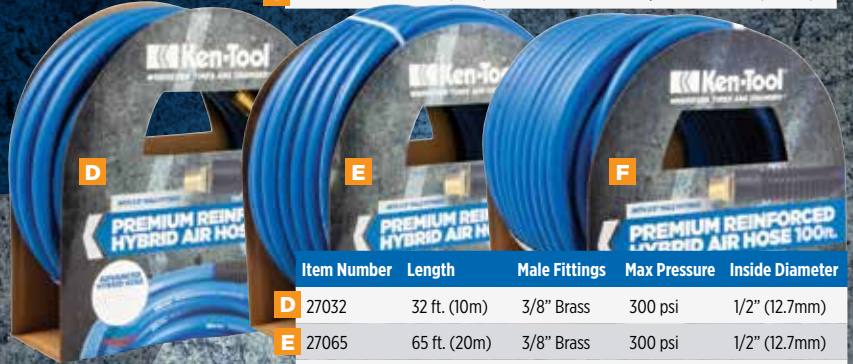

Item Number	Length	Male Fittings	Max Pressure	Inside Diameter
D 27032	32 ft. (10m)	3/8" Brass	300 psi	1/2" (12.7mm)
E 27065	65 ft. (20m)	3/8" Brass	300 psi	1/2" (12.7mm)
F 27100	100 ft. (30m)	3/8" Brass	300 psi	1/2" (12.7mm)

HEAVY DUTY TRUCK TIRE INFLATION KIT

WITH GLAD HAND AND DUAL FOOT AIR CHUCK PN 26050


FOR USE WITH KEN-TOOL'S AIRBOSS AIR TOOLS AND OTHER BRANDS OF AIR TOOLS

Length: 50 ft. (15.24m), Male Fittings: 1/4" Brass, Max Pressure: 300 psi, Inside Diameter: 3/8" (9.2mm)

A simple way to top off your tires utilizing your on-board compressor!



GLAD HAND ATTACHES PAINLESSLY TO HEAVY-DUTY AIR BRAKE EQUIPPED TRUCKS

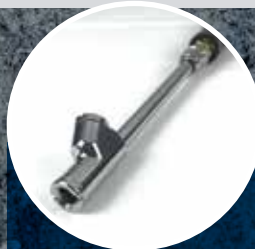

QUICK INFLATION WITH STRAIGHT-ON DUAL FOOT CHUCK

Length: 2 ft. (61cm)
Max Pressure: 300 psi
1/4" SWIVEL MALE FITTING ON ONE END AND 1/4" FEMALE FITTING ON THE OTHER.

WHIP HOSE

SHORT LENGTH DESIGNED FOR CONNECTING ACCESSORIES PN 26024

www.KENTOOL.com

1-888-536-8665

768 E. North Street, P.O. Box 9320 | Akron, Ohio 44305 | Fax: 800-872-4929 | Phone: 330-535-7177 | Fax: 330-535-1345 | E-mail: sales@kentool.com

© 2023 Ken-Tool. All Rights Reserved. KT20230706