



TUBELESS TIRE IRONS & SETS

Sets provide all irons necessary for a variety of tire changing applications. Use "C" bar with the "B" extension bar for easier use on large, wide-base truck tires. Use on standard and large truck tires, including industrial, farm, buses, and tractors.

STANDARD TIRE IRON SET 34746 T46

T46 Accessories Set Weight: 12 Lbs (5.4 kg)

Model	Item No.	Description	Length	Stock	Weight
A T46A	34747	Straight Mount/Demount Tool	36" 91 cm	3/4" 19 mm	4.5 lbs 2 kg
B T46B	34748	Straight Mount/Demount Tool "B" Extension for T46C	36" 91 cm	3/4" 19 mm	4.5 lbs 2 kg
C T46C	34749	Offset Mount "C" Bar	22" 56 cm	3/4" 19 mm	3 lbs 1.4 kg

HEAVY DUTY TIRE IRON SET 34846 T47

T47 Accessories Set Weight: 29 Lbs (13.1 kg)

T47A end

Model	Item No.	Description	Length	Stock	Weight
A T47A	34847	Straight Mount/Demount Tool	52" 132 cm	1" 25 mm	11 lbs 5 kg
B T47B	34848	Straight Mount/Demount Tool "B" Extension for T47C	49-1/2" 126 cm	1" 25 mm	11 lbs 5 kg
C T47C	34849	Offset Mount "C" Bar	27" 69 cm	1" 25 mm	6.6 lbs 3 kg



TUBELESS TRUCK TIRE MOUNT/DEMOUNT IRONS

Use on truck, agricultural, and industrial tires. One-piece manufacturing process and design assures long life and superior performance. Heat-treated for strength. Use in pairs. T45A® is a registered trademark of Ken-Tool.


T45AC Classic™ TUBELESS TRUCK TIRE MOUNT/DEMOUNT IRONS




Model	Item No.	Length	Stock	Weight
D T45A®	34645	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)
E T45AC™	34645C	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)
T45AS	34649	52" (132 cm)	7/8" (22mm)	9 lbs (4.1 kg)
T45HD	34647	41" (104 cm)	7/8" (22 mm)	7 lbs (3.2 kg)
T47A	34847	52" (132 cm)	1" (25 mm)	11 lbs (5 kg)

TUBELESS TIRE IRON 34644 T45A-2000K™ STYLE


Length 37" (94 cm) | Stock 3/4" (19 mm) | Weight 5 lbs (2.2 kg)

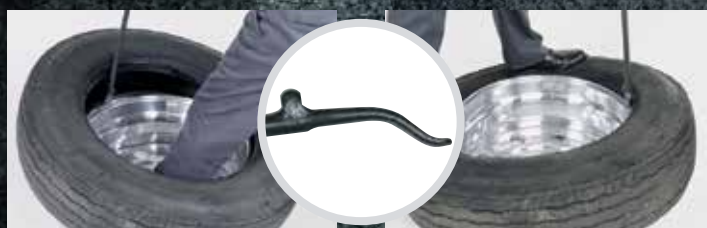

Mount end: Precision forged knob grips rim. New design won't slip during tire mounting. Special curve design always grabs the bead edge.

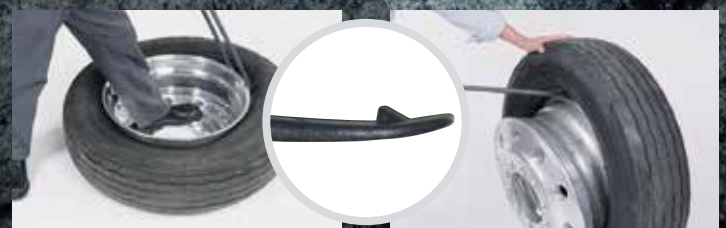

Demount end: Precision-forged angled tip slides between bead and rim easily. Forged design won't slip when demounting the second bead.

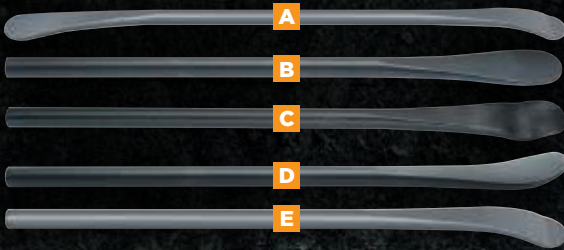

TIRE MOUNT/DEMOUNT SPOONS

These tools are designed for fast and efficient tire changing. Use the 18" and 24" spoons to mount or demount passenger car, motorcycle, ATV, and light truck tires. The 30" spoons provide enough strength and leverage to work on large truck, bus, off-road vehicle, tractor, and aircraft tires.



	Model	Item No.	Length	Stock	Weight
A		33052	30" (76cm)		
Straight (Recta Droite)					
B	T1X	32101	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
	T19	32119	24" (61 cm)	11/16" (17.5 mm)	2.5 lbs (1.1 kg)
	T19A	33219	30" (76 cm)	11/16" (17.5 mm)	3 lbs (1.4 kg)
	T19M	33022	30" (76 cm)	3/4" (19 mm)	3.4 lbs (1.54 kg)
	T38	33238	30" (76 cm)	7/8" (22 mm)	4.8 lbs (2.2 kg)
Drop-Center (Combinación con base con caída Base creuse)					
C	T21R	32121	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
	T21F	34121	24" (61 cm)	11/16" (17.5 mm)	2.5 lbs (1.1 kg)
	T21A	33020	30" (76 cm)	11/16" (17.5 mm)	3.1 lbs (1.4 kg)
	T21M	33024	30" (76 cm)	3/4" (19 mm)	3.4 lbs (1.54 kg)
	T21HD	34122	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)
Curved (Curva Courbe)					
D	T2X	32102	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
	T20	32120	24" (61 cm)	11/16" (17.5 mm)	2.4 lbs (1.1 kg)
	T20A	33220	30" (76 cm)	11/16" (17.5 mm)	3.1 lbs (1.4 kg)
	T20M	33023	30" (76 cm)	3/4" (19 mm)	3.4 lbs (1.54 kg)
	T39	33239	30" (76 cm)	7/8" (22 mm)	4.5 lbs (2.0 kg)
Curved with Flat (Curva con punta plana Courbe avec embout plat)					
E	T22R	31820	18" (46 cm)	11/16" (17.5 mm)	1.8 lbs (.8 kg)
	T22F	32420	24" (61 cm)	11/16" (17.5 mm)	2.5 lbs (1.1 kg)
	T22A	33021	30" (76 cm)	11/16" (17.5 mm)	3.1 lbs (1.4 kg)
	T22M	33025	30" (76 cm)	3/4" (19 mm)	3.4 lbs (1.54 kg)
	T22HD	33026	30" (76 cm)	7/8" (22 mm)	3.4 lbs (1.54 kg)

LOCK RING TOOLS

These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.



F TRUCK LOCK RING REMOVER 32123 T23®
Length: 24" (61 cm) Stock: 11/16" (17.5 mm) Weight: 2.4 lbs (1 kg)

Designed for smaller diameter wheels.

G TRUCK LOCK RING REMOVER 33223 T23A®
Length: 30" (76 cm) Stock: 11/16" (17.5 mm) Weight: 3.1 lbs (1.4 kg)

Designed for smaller diameter wheels.

H COMBINATION RIM/RING TOOL 33224 T23B
Length: 23-1/2" (60 cm) Stock: 11/16" (17.5 mm) Weight: 2.4 lbs (1 kg)

Flat tapered end ideal for all around ring and rim work.

I RIM LOCK TOOL 32125 T25
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

For servicing wide base rims.

J SPECIAL LOCK RING TOOL 32127 T27
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

Long tapered curved end for continuous side rings.

K LOCK RING TOOL 32128 T27A
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

Removes continuous side rings on two-piece truck rims.

L HEAVY-DUTY LOCK RING TOOL 34648 T48A
Length: 37" (94 cm) Stock: 3/4" (19 mm) Weight: 4.6 lbs (2.1 kg)
Use for multi-piece wheels, especially hub type.