Ken-Tool®

WHEREVER TIRES ARE CHANGED™

TORQUE MASTER®

TORQUE LIMITING SOCKET KITS

For foreign and domestic cars and light trucks. Tighten nuts to factory specifications each time the wheels are replaced. Color and letter coded for quick size and torque reference. Converts any impact gun, including those with an extended anvil, into an instant torque wrench by bleeding torque off the impact gun. Limited lifetime warranty.

1/2" DRIVE

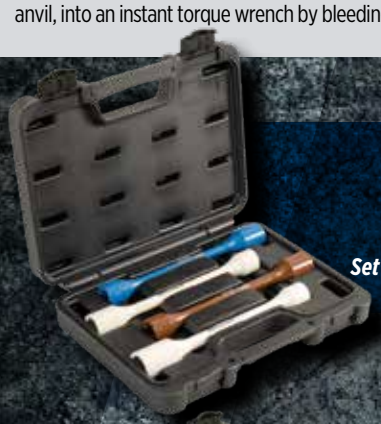

TORQUE MASTER® 4 PC STARTER KIT
PN 30174
Set Weight: 4.4 lbs (2 kg)

Item No.	Color	Torque
30181	Brown (A)	100 ft/lbs.
30183	Gray (C)	100 ft/lbs.
30185	Blue (E)	80 ft/lbs.
30189	White (I)	120 ft/lbs.

TORQUE MASTER® 4 PC SUV KIT
PN 30175
Set Weight: 4.5 lbs (2 kg)

Item No.	Color	Torque
30181	Brown (A)	100 ft/lbs.
30183	Gray (C)	100 ft/lbs.
30200	Aqua (Q)	140 ft/lbs.
30204	Turquoise (BB)	150 ft/lbs.

TORQUE MASTER® 6 PC KIT
PN 30176
Set Weight: 6.9 lbs (3.1 kg)

Item No.	Color	Torque
30181	Brown (A)	100 ft/lbs.
30183	Gray (C)	100 ft/lbs.
30184	Black (D)	60 ft/lbs.
30185	Blue (E)	80 ft/lbs.
30186	Yellow (F)	65 ft/lbs.
30189	White (I)	120 ft/lbs.

TORQUE MASTER® 10 PC KIT
PN 30180
Set Weight: 9.5 lbs (4.3 kg)

Item No.	Color	Torque
30181	Brown (A)	100 ft/lbs.
30182	Orange (B)	80 ft/lbs.
30183	Gray (C)	100 ft/lbs.
30184	Black (D)	60 ft/lbs.
30185	Blue (E)	80 ft/lbs.
30186	Yellow (F)	65 ft/lbs.
30187	Red (G)	80 ft/lbs.
30188	Dark Green (H)	45 ft/lbs.
30189	White (I)	120 ft/lbs.
30200	Aqua (Q)	140 ft/lbs.

TORQUE MASTER® INDIVIDUAL SOCKETS

Item No.	Description	Socket Opening	Torque	Weight
30181	Brown (A)	13/16"	100 ft-lbs	.5 lbs (.2 kg)
30182	Orange (B)	21 mm	80 ft-lbs	.5 lbs (.2 kg)
30183	Gray (C)	19 mm (3/4")	100 ft-lbs	.5 lbs (.2 kg)
30184	Black (D)	21 mm	60 ft-lbs	.5 lbs (.2 kg)
30185	Blue (E)	19 mm (3/4")	80 ft-lbs	.5 lbs (.2 kg)
30186	Yellow (F)	19 mm (3/4")	65 ft-lbs	.5 lbs (.2 kg)
30187	Red (G)	17 mm	80 ft-lbs	.5 lbs (.2 kg)
30188	Dark Green (H)	17 mm	45 ft-lbs	.5 lbs (.2 kg)
30189	White (I)	7/8"	120 ft-lbs	.5 lbs (.2 kg)
30195	Tan (J)	1"	140 ft-lbs	.5 lbs (.2 kg)
30196	Light Purple (K)	17 mm	110 ft-lbs	.5 lbs (.2 kg)
30197	Green (L)	1"	170 ft-lbs	.5 lbs (.2 kg)
30198	Crimson Red (V)	1-1/16"	140 ft-lbs	.5 lbs (.2 kg)
30200	Aqua (Q)	7/8"	140 ft-lbs	.5 lbs (.2 kg)
30201	Bright Green (T)	15/16"	135 ft-lbs	.5 lbs (.2 kg)
30202	Navy Blue (Y)	7/8"	100 ft-lbs	.5 lbs (.2 kg)
30203	Light Tan (Z)	7/8"	65 ft-lbs	.5 lbs (.2 kg)
30204	Turquoise (BB)	21 mm	150 ft-lbs	.5 lbs (.2 kg)
30205	Light Pink (CC)	17 mm	90 ft-lbs	.5 lbs (.2 kg)
30206	Sky Blue (DD)	21 mm	100 ft-lbs	.5 lbs (.2 kg)
30207	Safety Purple (EE)	22 mm	140 ft-lbs	.5 lbs (.2 kg)
30208	Yellow Gray (FF)	19 mm	180 ft-lbs	.5 lbs (.2 kg)
30211	Quartz Gray (KK)	19 mm	120 ft-lbs	.5 lbs (.2 kg)
30212	Fuchsia (LL)	22 mm	175 ft-lbs	.5 lbs (.2 kg)
30213	Gold (NN)	19 mm	90 ft-lbs	.5 lbs (.2 kg)
30214	Salmon (QQ)	22 mm	95 ft-lbs	.5 lbs (.2 kg)
30216	Deep Purple (UU)	14 mm	75 ft-lbs	.5 lbs (.2 kg)
30217	Vanilla (XX)	13/16"	160 ft-lbs	.5 lbs (.2 kg)
30218	Honey Yellow (JJ)	19 mm	145 ft-lbs	.5 lbs (.2 kg)
30222	Silver Sparkle (SS)	21 mm	110 ft-lbs	.5 lbs (.2 kg)

For domestic and foreign SUVs. Tighten lug nuts to factory specifications. Color and letter coded for quick size and torque reference.

Ken-Tool®

WHEREVER TIRES ARE CHANGED™

TORQUE MASTER® TORQUE EXTENSION KITS

1/2" DRIVE

Convert your own sockets into torque sockets.

Item No.	Color	Torque
30220	Aqua (Q)	140 ft/lbs.
30223	Gray (C)	100 ft/lbs.
30225	Blue (E)	80 ft/lbs.
30226	Yellow (F)	65 ft/lbs.
30229	White (I)	120 ft/lbs.

TORQUE MASTER® 5 PC EXTENSION KIT - PASSENGER CAR

PN 30235

Set Weight: 4 lbs (1.8 kg)

TORQUE MASTER® 10 PC EXTENSION KIT - PASSENGER CAR & LIGHT TRUCK

PN 30251

Set Weight: 7.6 lbs (3.5 kg)

Item No.	Color	Torque
30220	Aqua (Q)	140 ft/lbs.
30223	Gray (C)	100 ft/lbs.
30224	Black (D)	60 ft/lbs.
30225	Blue (E)	80 ft/lbs.
30226	Yellow (F)	65 ft/lbs.
30228	Dark Green (H)	45 ft/lbs.
30229	White (I)	120 ft/lbs.
30248	Light Purple (K)	110 ft/lbs.
30249	Neon Yellow (OO)	75 ft/lbs.
30247	Gold (NN)	90 ft/lbs.

TORQUE MASTER® INDIVIDUAL TORQUE EXTENSIONS

Item No.	Description	Socket Opening	Torque	Weight
30255	Black Oxide (A)	3/8"	30 ft-lbs	.5 lbs (.2 kg)
30256	Black Oxide (B)	3/8"	40 ft-lbs	.5 lbs (.2 kg)
30257	Black Oxide (C)	3/8"	50 ft-lbs	.5 lbs (.2 kg)
30258	Black Oxide (D)	3/8"	60 ft-lbs	.5 lbs (.2 kg)
30219	Orange (B)	1/2"	160 ft-lbs	.7 lbs (.3 kg)
30220	Aqua (Q)	1/2"	140 ft-lbs	.7 lbs (.3 kg)
30221	Light Blue (S)	1/2"	55 ft-lbs	.7 lbs (.3 kg)
30223	Gray (C)	1/2"	100 ft-lbs	.7 lbs (.3 kg)
30224	Black (D)	1/2"	60 ft-lbs	.7 lbs (.3 kg)
30225	Blue (E)	1/2"	80 ft-lbs	.7 lbs (.3 kg)
30226	Yellow (F)	1/2"	65 ft-lbs	.7 lbs (.3 kg)
30227	Fuchsia (LL)	1/2"	175 ft-lbs	.7 lbs (.3 kg)
30228	Dark Green (H)	1/2"	45 ft-lbs	.7 lbs (.3 kg)
30229	White (I)	1/2"	120 ft-lbs	.7 lbs (.3 kg)
30243	Turquoise (G)	1/2"	150 ft-lbs	.7 lbs (.3 kg)
30244	Bright Green (T)	1/2"	135 ft-lbs	.7 lbs (.3 kg)
30247	Gold (NN)	1/2"	90 ft-lbs	.7 lbs (.3 kg)
30248	Light Purple (K)	1/2"	110 ft-lbs	.7 lbs (.3 kg)
30249	Neon Yellow (OO)	1/2"	75 ft-lbs	.7 lbs (.3 kg)
30250	Green (L)	1/2"	170 ft-lbs	.7 lbs (.3 kg)

TORQUE MASTER® INDIVIDUAL HEAVY-DUTY TRUCK TORQUE EXTENSIONS

Convert your own sockets into torque sockets for use on commercial, heavy-duty trucks, and buses.

Item No.	Description	Socket Opening	Torque	Weight
30230	Yellow (O)	3/4 "	175 ft-lbs	.75 lbs (.3 kg)
30231	Yellow (N)	3/4 "	250 ft-lbs	.75 lbs (.3 kg)
30232	Yellow (U)	3/4 "	350 ft-lbs	.75 lbs (.3 kg)
30233	Yellow (M)	3/4 "	475 ft-lbs	.75 lbs (.3 kg)
30236	Yellow (T)	1"	175 ft-lbs	1 lb (.5 kg)
30237	Yellow (R)	1"	250 ft-lbs	1 lb (.5 kg)
30238	Yellow (S)	1"	350 ft-lbs	1 lb (.5 kg)
30239	Yellow (P)	1"	475 ft-lbs	1 lb (.5 kg)
30240	Yellow (W)	1"	650 ft-lbs	1 lb (.5 kg)
30241	Yellow (Q)	1"	300 ft-lbs	1 lb (.5 kg)
30242	Yellow (Y)	1"	550 ft-lbs	1 lb (.5 kg)

www.KENTOOL.com

1-888-536-8665

768 E. North Street, P.O. Box 9320 | Akron, Ohio 44305 | 330-535-7177 | sales@kentool.com |

© 2026 Ken-Tool. All Rights Reserved.
KT20260617

WARNING: Torque sockets and truck torque extensions cannot be used to take off wheel nuts. Calibrate your impact gun and follow all manufacturers' recommended procedures when using Torque Master products.